

## LUBE TUBE

Manually Applied Lubricant Stick

### EXTREME PRESSURE LUBRICANT

Prevents the build-up of frictional heat

### DESIGNED TO BE APPLIED TO BAND SAW BLADES AND OTHER CUTTING TOOLS

Improves overall tool life and productivity when sawing, drilling, milling, grinding, threading and tapping. Works well on abrasives (belts, sanding discs and pads)

### CAN BE USED ON FERROUS AND NON-FERROUS METALS, ALUMINUM GATES AND RISERS, PLATES AND EXTRUSIONS

BIODEGRADABLE, NON-TOXIC AND NON-STAINING



PROD NO	CONTAINER SIZE		TUBES PER CASE	NFPA CODE SPECS
	OUNCES	GRAMS		
68020	14.5	411.1	12	<b>HMIS/WHMIS</b> HEALTH INDEX – 0 FLAMMABILITY – 0 REACTIVITY – 0 PERSONAL PROTECTION – A


HEALTH

0

0

0

SPECIAL HAZARD



FIRE

0

REACTIVITY

## LENOX PROTOOL LUBE®

Extends Tool Life

### A UNIQUE SYNTHETIC EMULSION DESIGNED TO INCREASE TOOL LIFE

For cutting, milling, reaming, tapping and drilling metal, wood and plastics

### SHORTENS CUTTING TIME BY UP TO 50%


Provides smoother, cleaner cutting and dramatically longer blade life

### REDUCES HEAT AND FRICTION

Water-soluble so it cleans up with water

### BIODEGRADABLE AND NON-TOXIC

EASY TO USE, FLIP-TOP BOTTLE FITS IN YOUR TOOL BOX

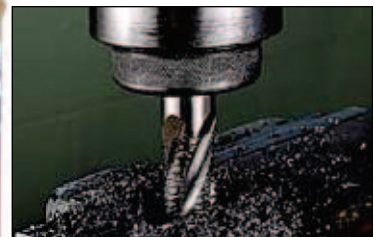

PRODUCT NO	DESCRIPTION	NFPA CODE SPECS
68040	6 oz / .17 liter bottle LENOX PROTOOL LUBE (12 per pack)	<b>HMIS/WHMIS</b> HEALTH INDEX –1 FLAMMABILITY – 0 REACTIVITY – 0 PERSONAL PROTECTION – A
68047	1 gallon / 3.8 liter container LENOX PROTOOL LUBE	
68048	5 gallon / 18.9 liter container LENOX PROTOOL LUBE	
68050	55 gallon / 208.2 liter drum LENOX PROTOOL LUBE	


HEALTH

1

0

0

SPECIAL HAZARD



FIRE

0

REACTIVITY

*Use this product as it comes from the container—do not mix with water.*

MSDS available in hard copy or downloadable from [lenoxtools.com](http://lenoxtools.com)